
	Classroom
Name:	Exercise 1

## SEPTIC SYSTEM COMPONENTS AND DISTANCES

- 1. Label the five different components of a subsurface sewage disposal system.
- 2. Using Table 1, indicate the minimum separation distances from the subsurface sewage disposal system:
  - 1. House (without foundation drains)
  - 2. Garage (on slab with full frost wall, no rooms above)
  - 3. Well (withdraw rate of 7 GPM)
  - 4. Side Property line (system installed in grade, not elevated in select fill)
  - 5. Utility Trench

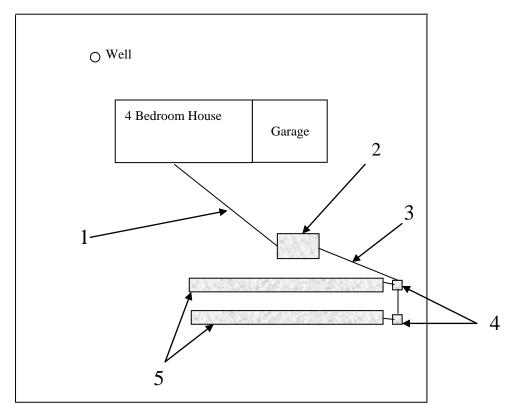

Septic System Components	Separation Distances	
1.	1. House to: Tank ft Leac	hing ft
2.	2. Garage: ft	
3.	3. <u>Well:</u> <u>ft</u>	
4.	4. Side Property Line: f	<u>t</u>
5.	5. Utility Trench:	